

TEST REPORT

Power Resistor Sanity Check

Sanity check of the resistance calibration routine using a known power-resistor load.


Document ID	OV-TEST-HW-RESISTOR-SANITY
Test ID	3
Version	0.1
Date	2026-08-08
Status	draft
Applies to	openvvvf-control-module, chassis-size-2
Product line	openvvvf
Normative references	OV-TEST-HW-MOTOR-CAL-INDEX, OV-TEST-HW-INDEX

1. Power Resistor Sanity Check

This report checks that the `cal Motor.Resistance` routine returns a sensible value for a purely resistive, high-impedance load. A known power resistor was connected across two inverter phases; the routine's estimate is compared against a direct LCR measurement.

1.1. Test setup

- Load: 23 Ω power resistor tied across phases U and V.
- DC bus: ~ 121 V.
- Chassis: C2 test fixture.
- Command: `cal Motor.Resistance 8.0 --force`.

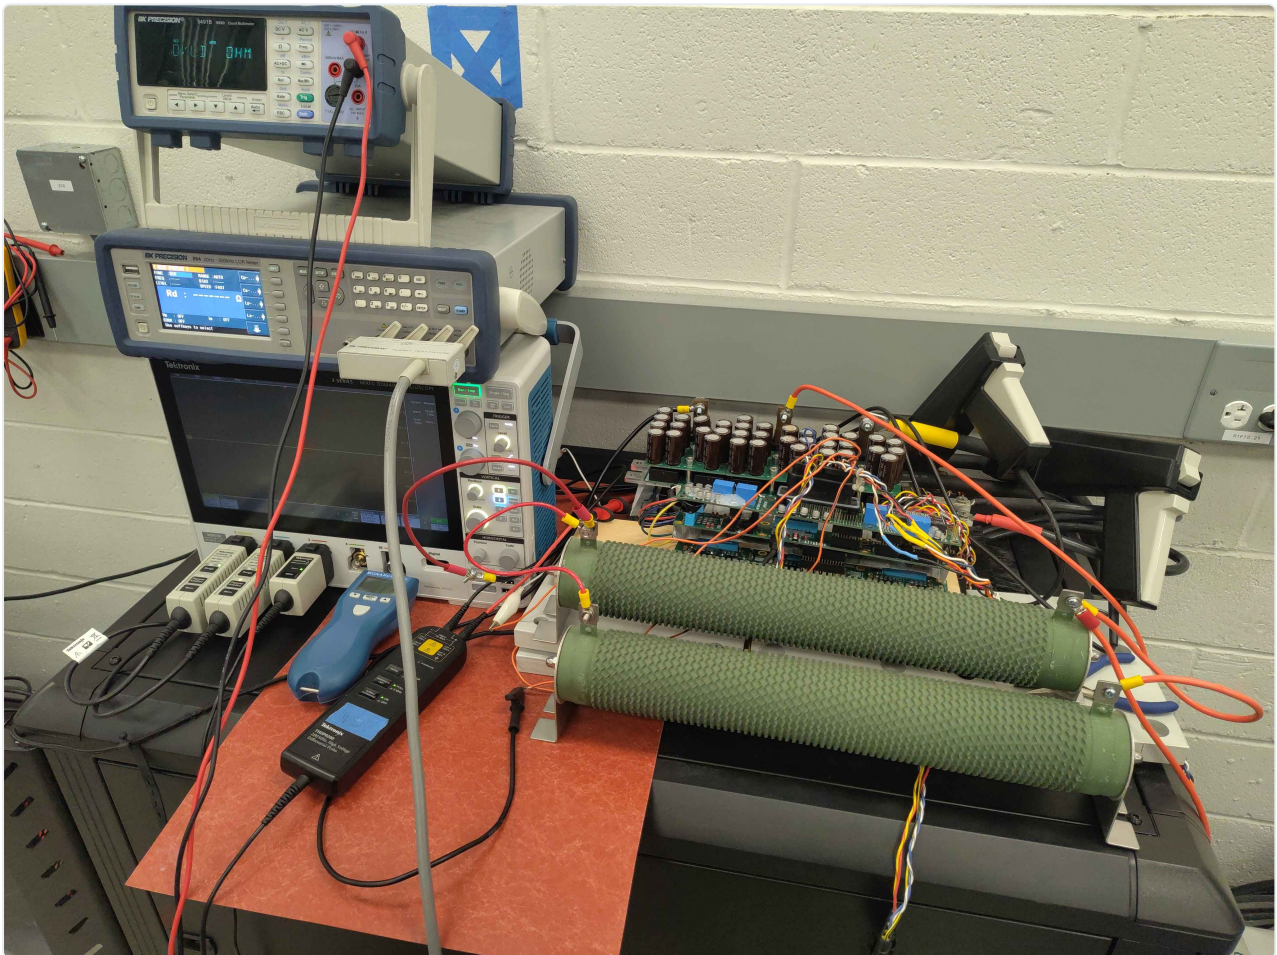

1.2. Instrument reference

- **Instrument:** BK Precision 894 20 Hz - 500 kHz LCR Meter
- **Function:** DCR

- **Range:** AUTO
- **Speed:** FAST

Parameter	Value
Rd	23.3070 Ω



1.3. Inverter-calibrated resistance

Parameter	Value
Calibrated UV line-to-line	20.94 Ω
Calibrated UV per-phase	10.47 Ω
Max current reached (UV)	0.345 A
Fit offset (V_off)	23.6 V
UW measurement	Failed (non-positive resistance)

OPEN TELEMETRY LOG:

View this calibration in the Telemetry Viewer

- Command log: PowerResistor-Command-Log.txt
- Raw telemetry: PowerResistor-Telemetry.jsonl

1.4. Analysis

The reading is about 9 % low (20.94 Ω vs 23.31 Ω reference). That is expected for this test point because the current was pushed down by the high resistance load.

At ~0.3 A the IGBTs are operating in the knee region, where

$$V_{ce} \approx V_f(\text{knee}) + I_c \cdot R_{ce}(\text{on})$$

The knee voltage across the two conducting IGBTs is large compared with the ~6-7 V across the resistor, so the linear fit absorbs most of the knee as an offset. Because the knee is slightly curved, the slope is biased low. The 23.6 V fit offset is consistent with this explanation.

The UW phase failed because the resistor was not connected across U-W; the measured current had the wrong sign and the fit produced a negative resistance. This is normal for a single-pair measurement.

This result is not motor-grade accuracy, but it confirms the calibration is in the right decade and is not producing the milliohm-scale nonsense that appears when the routine is run without a real load.

1.5. Notes

- For a real motor with line-to-line resistance of a few ohms or less, the routine can push tens of amps, the IGBT knee becomes a small fixed offset, and the fit accuracy improves significantly.
- A repeat test with a lower-value resistor or higher bus voltage would move the operating point above the IGBT knee and give a closer match to the reference.